

# DA-350


## Class-D Single Channel 350W Power Amplifier

AC & 24V DC

Class-D Amp

100V+8Ω

350W RMS

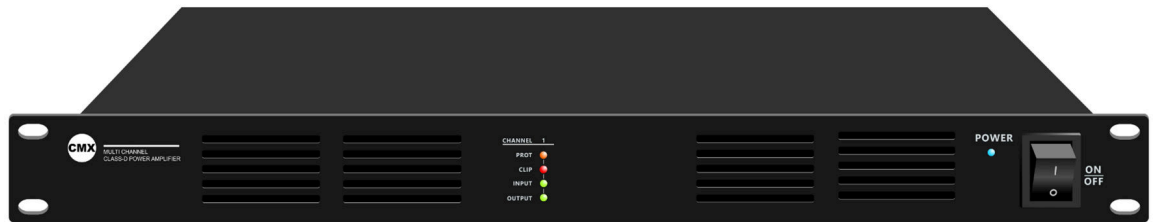

### Features:

- ✓ Switching power technology digital power amplifier
- ✓ Class-D PA power amplifier of minimum power consumption
- ✓ 1RU height for less rack space and less heat generation
- ✓ Single channel power amplifier into 19" rack mount unit
- ✓ Rated power output at 350W
- ✓ Speaker outputs 8Ω/100V
- ✓ Balanced line input by phoenix connector
- ✓ Each input with separate gain control.
- ✓ Each channel with high-cut filter.
- ✓ Built-in auto standby feature to save power consumption
- ✓ Separate indicators for protection, clip, input and output
- ✓ Complete short circuit, overload, high temp, clip and DC protection
- ✓ Wide AC input switchable between 115V and 230V
- ✓ 24V DC input is included.

### Description:

The DA range digital class-D power amplifier is of switching power technology, which features of minimum power consumption and much higher efficiency up to 85%, moreover it helps to save installation rack space, generate less heat so as to extend its performance life span as a result.

The DA-350 is of rated power output at 350W, so it could be used as digital public address system at minimum cost. The versatile loudspeaker outputs of both high impedance 100V & low impedance 8ohms enable it meet both PA fixed installation and Hi-fi stereo sound installation jobs.

There are one balanced inputs by phoenix connector with gain control. Speaker outputs both by 100V & 8ohms. The built-in high-pass filters could be enabled or disabled through the dip switch pre-setting.


Automatic standby enable after no detection of signal input for one minute, immediately wake up at sight of any input. Visual working status indicators include protection, clip, input and output for easy supervision. With complete short circuit, overload, high temp, clip and DC protection.

Switchable AC power supply from 115V to 230V, thus it support worldwide sound system installation. 24V input is included.

# DA-350

## Class-D Single Channel 350W Power Amplifier

### Rear Panel:

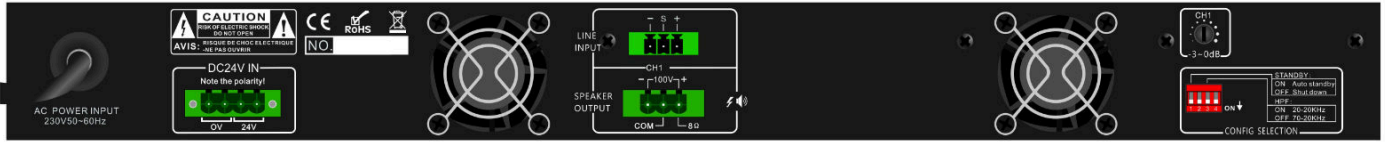

### Specification:

|                           |  |
|---------------------------|--|
| <b>Model</b>              | <b>DA-350</b>  |
| <b>Description</b>        | Class-D Single Channel 350W Power Amplifier                                |
| <b>Rated Power Output</b> | 350W   |
| <b>Speaker Output</b>     | 8Ω & 100V  |
| <b>Frequency Response</b> | L/H Cut OFF 20Hz-20KHz (+1/-2dB)<br>L/H Cut ON 70Hz-10KHz (+1/-3dB)        |
| <b>Input</b>              | 0.775V, 0dBu, balanced phoenix connector                                   |
| <b>Input Impedance</b>    | 10KΩ   |
| <b>THD</b>                | <0.1% (1KHz/-3dBv, 100W)   |
| <b>S/N Ratio</b>          | >80dB  |
| <b>Crosstalk</b>          | >60dB, 1KHz, Max output  |
| <b>Power Consumption</b>  | 420W   |
| <b>Power Supply</b>       | AC input switchable between 115V & 230V, 50-60Hz<br>24V DC input included. |
| <b>Dimension</b>          | 482(W)x420(D)x44(H) mm   |
| <b>Weight</b>             | 5kg  |

### Applications:



**Voice Evacuation System**  
School, Airport, Train Station



**AV Control System**  
Hotel, Conventional Center, Stadium

