

# DA-60MT/DA-120MT/DA-240MT/DA-350MT/DA-500MT PA 6 Zone Mixer Amplifier with Mp3 & Tuner



## Description:

The PA 6 Zone Mixer Amplifier with MP3 and FM tuner, its rated power output from 60W, 120W, 240W, 350W to 500W, it is ideal for school, super market, bank, hotel BGM and speech use. It is all in one solution with two sources, pre amplifier and mixer power amplifier into one 19" 2U height unit, which is economy but of high reliable performance.

It integrates 2 audio sources into a mixer amplifier, plus Mic1(6.3mm) and Mic/Line input 2-4 (XLR), two line inputs, one EMC input and one RS45 input for 6 zone remote paging microphone. Mic1 VOX with highest priority except EMC input. One USB and one SD slots on front provide easy access and operation for installer and end-user.


The amplifier is design with complete protection of overload, short circuit and high temp to avoid any damage.

These amplifiers are suitable for applications in bank, mosque, school, hotel, restaurant, theme centers and shopping center.

## Features:


- ✓ Public address (PA) 6 zone commercial mixer power amplifier.
- ✓ 19" rack mount amplifier of 2U height.
- ✓ Rated outputs of 60W, 120W, 240W, 350W to 500W.
- ✓ 6 zone speaker outputs of 100V or 70V.
- ✓ Six zone speaker outputs with independent volume control.
- ✓ Built-in MP3 player by USB & SD and FM tuner.
- ✓ Four microphone inputs, Mic1(6.3mm) and Mic/Line input 2-4 (XLR).
- ✓ Line 1-2 inputs on rear panel by RCA.
- ✓ EMC input on rear panel with highest priority by RCA.
- ✓ One amplifier capacity of 6 remote paging microphones DA-500RM up to 300 meters.
- ✓ Microphone1 of VOX features of highest input priority except EMC input.
- ✓ Volume control for Mic1-4 and line 1-2, bass & treble and zone volume control on front panel.
- ✓ AC and DC Power, protection, clip six zone status indicators and output level meters.
- ✓ Overload, short circuit and high temp protection.
- ✓ AC 230V and DC24V operation system.

## Front View of Remote Paging Microphone DA-500RM:

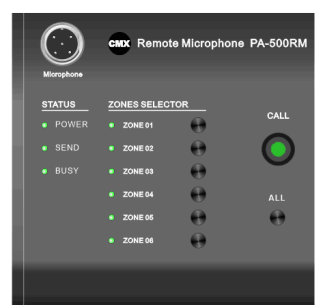

# DA-60MT/DA-120MT/DA-240MT/DA-350MT/DA-500MT PA 6 Zone Mixer Amplifier with Mp3 & Tuner

## Rear Panel:

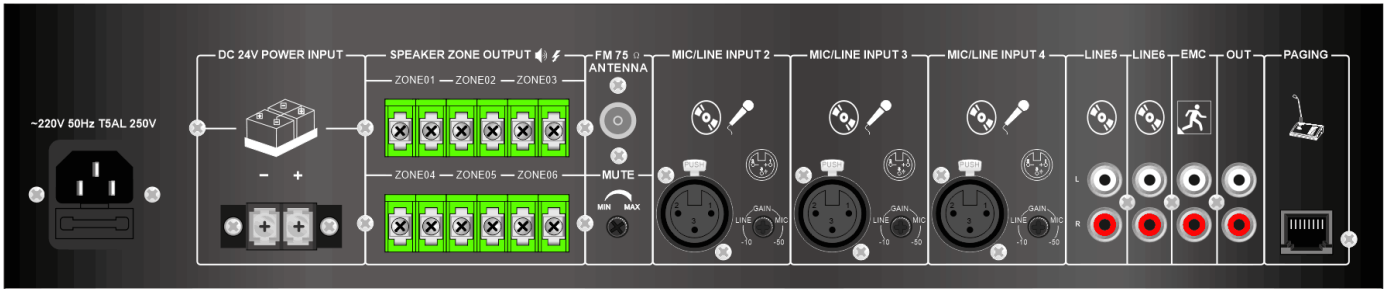

## Specification:

Model	DA-60MT	DA-120MT	DA-240MT	DA-350MT	DA-500MT
<b>Description</b>	PA 6 Zone Mixer Amplifier with Mp3 & Tuner				
<b>Rated Power Output</b>	60W RMS	120W RMS	240W RMS	350W RMS	500W RMS
<b>Speaker Output</b>	70V, 100V and 4-16Ω				
<b>Input</b>	Mic1-4: 2.5mV, Line1-2: 250mV; EMC: 250mV				
<b>Frequency Response</b>	80-16KHz				
<b>THD</b>	<0.1%				
<b>S/N Ratio</b>	>70dB				
<b>Protection</b>	High temp, short circuit, clip & overload protection				
<b>Power Supply</b>	AC230V or AC110V, 50-60Hz				
<b>Power Consumption</b>	100W	200W	400W	500W	650W
<b>Dimension</b>	418(W)×318(D)×88(H)mm				
<b>Weight</b>	8.2Kg	9.5kg	12kg	13kg	14.5kg
<b>Warranty</b>	5 years				

## Connection Diagrams:

